
Technical Sheet

CNAC15-G

Koblingsspiker 15-16° plastspiral – rund hode, ring skaft HDG

Hot dip galvanised plastic coil collated CNA connector nails fit in most common nail guns on the market with a angle of the nail of 15-16°.

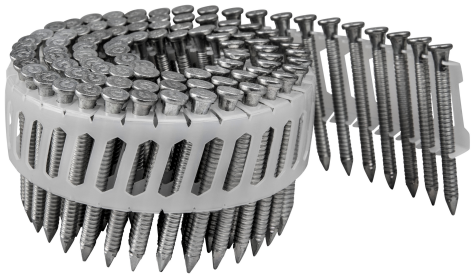

Features

Advantages

- Den koniske formen under hodet sikrer at spikeren er i full kontakt med hullet
- Høy uttrekkbarhet
- Varmgalvanisert
- Ringformet gjeng
- Plastspole 15-16°


Applications

Support

- Connectors to wood

CNAC15-G
Koblingsspiker 15-16° plastspiral – rund hode, ring skaft HDG

Teknisk data



Product dimensions

Referanse	Fasteners dimensjoner[mm]									
	Item Code	annet			produktdimensjoner[mm]					QD informasjon
		DB nr.	antall/eske	vekt[kg]	d[mm]	L[mm]	lg[mm]	dh[mm]	ht[mm]	antall per coil
CNAC15G4.0X40	76142	2124154	1200.0	0.005	4	40	25	7	1.5	100.0
CNAC15G4.0X50	76143	2124155	1200.0	0.006	4	50	35	7	1.5	100.0
CNAC15G4.0X60	76144	2124156	1200.0	0.007	4	60	45	7	1.5	100.0

Characteristic capacities

Referanse	spiker loads	
	Characteristic Capacities[kN]	
	Rax,k[kN]	Rlat,k[kN]
CNAC15G4.0X40	0.7	1.9
CNAC15G4.0X50	1	2.2
CNAC15G4.0X60	1.2	2.4

Capacities are for 2mm thick steel plates and Grade C24 timber. Please refer to ETA-04/0013 for capacities of other thickness and timber grades

Simpson Strong-Tie c/o
Christiania Spigerverk
Smalvollveien 58, 0667 Oslo
22021300
kundeservice@spigerverket.no

Copyright by Simpson Strong-Tie®
Informasjonen i dette dokumentet eies eksklusivt av Simpson Strong-Tie. De er kun gyldige i forbindelse med produkter solgt av Simpson Strong-Tie.